

Florina[®]
CERAMICS
- SINCE 2008 -

FR-C22A002

LOFT

Loft Napoli & Novara & Treviso

Florina




Finishes



Matt



600x1200mm 24"x48"

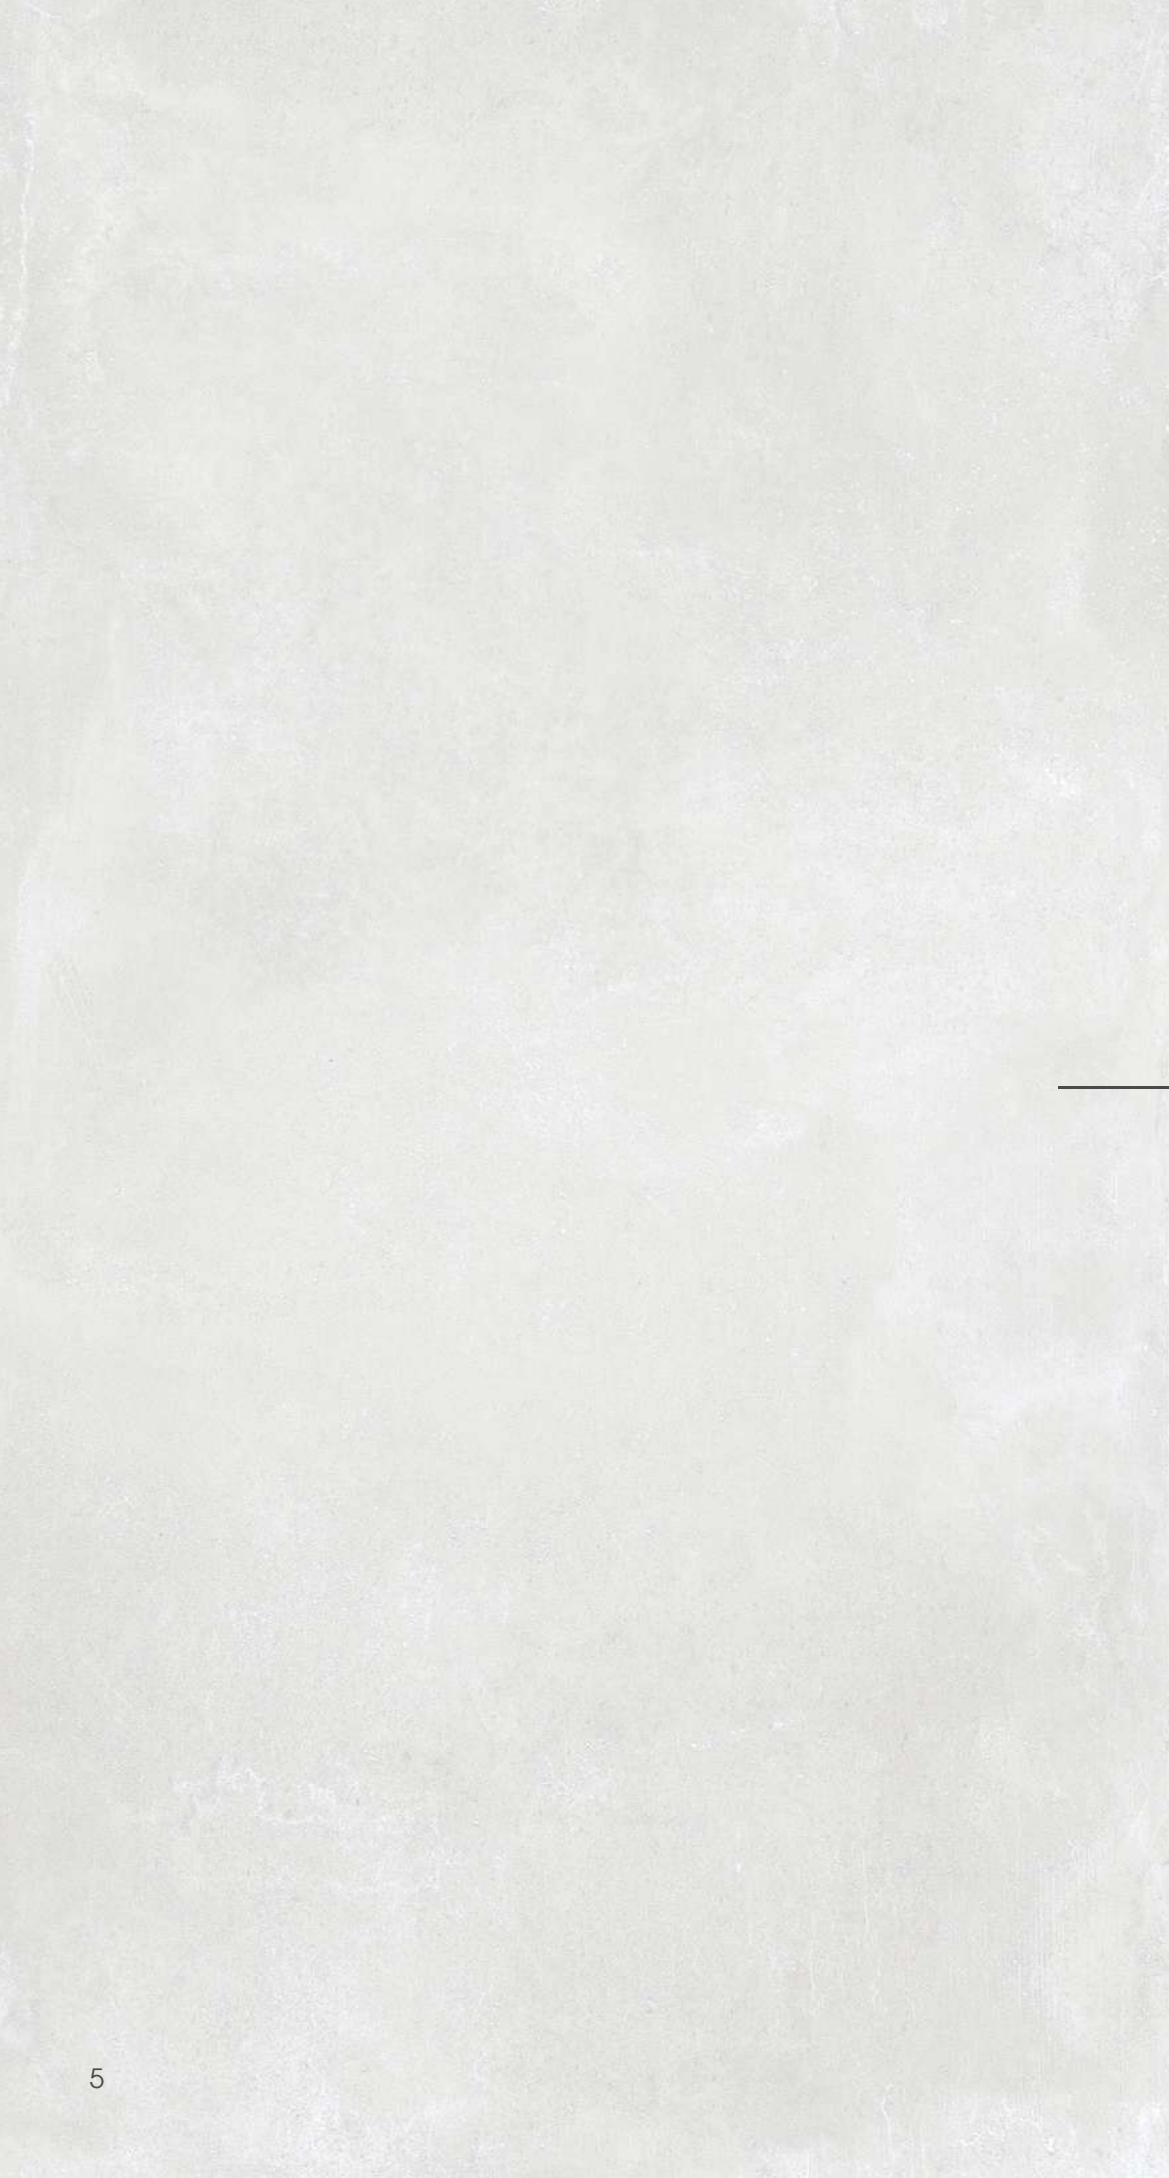

600x1200mm
24"x48"

Napoli
Bianco

LA1

9
faces



Wall

LA1 600x1200mm 24"x48"

Floor

UX3 900x1800mm 36"x72"





600x1200mm
24"x48"

Napoli
Cenere

LA2


9
faces



Wall
LA2 600x1200mm 24"x48"

Floor
LA2 600x1200mm 24"x48"



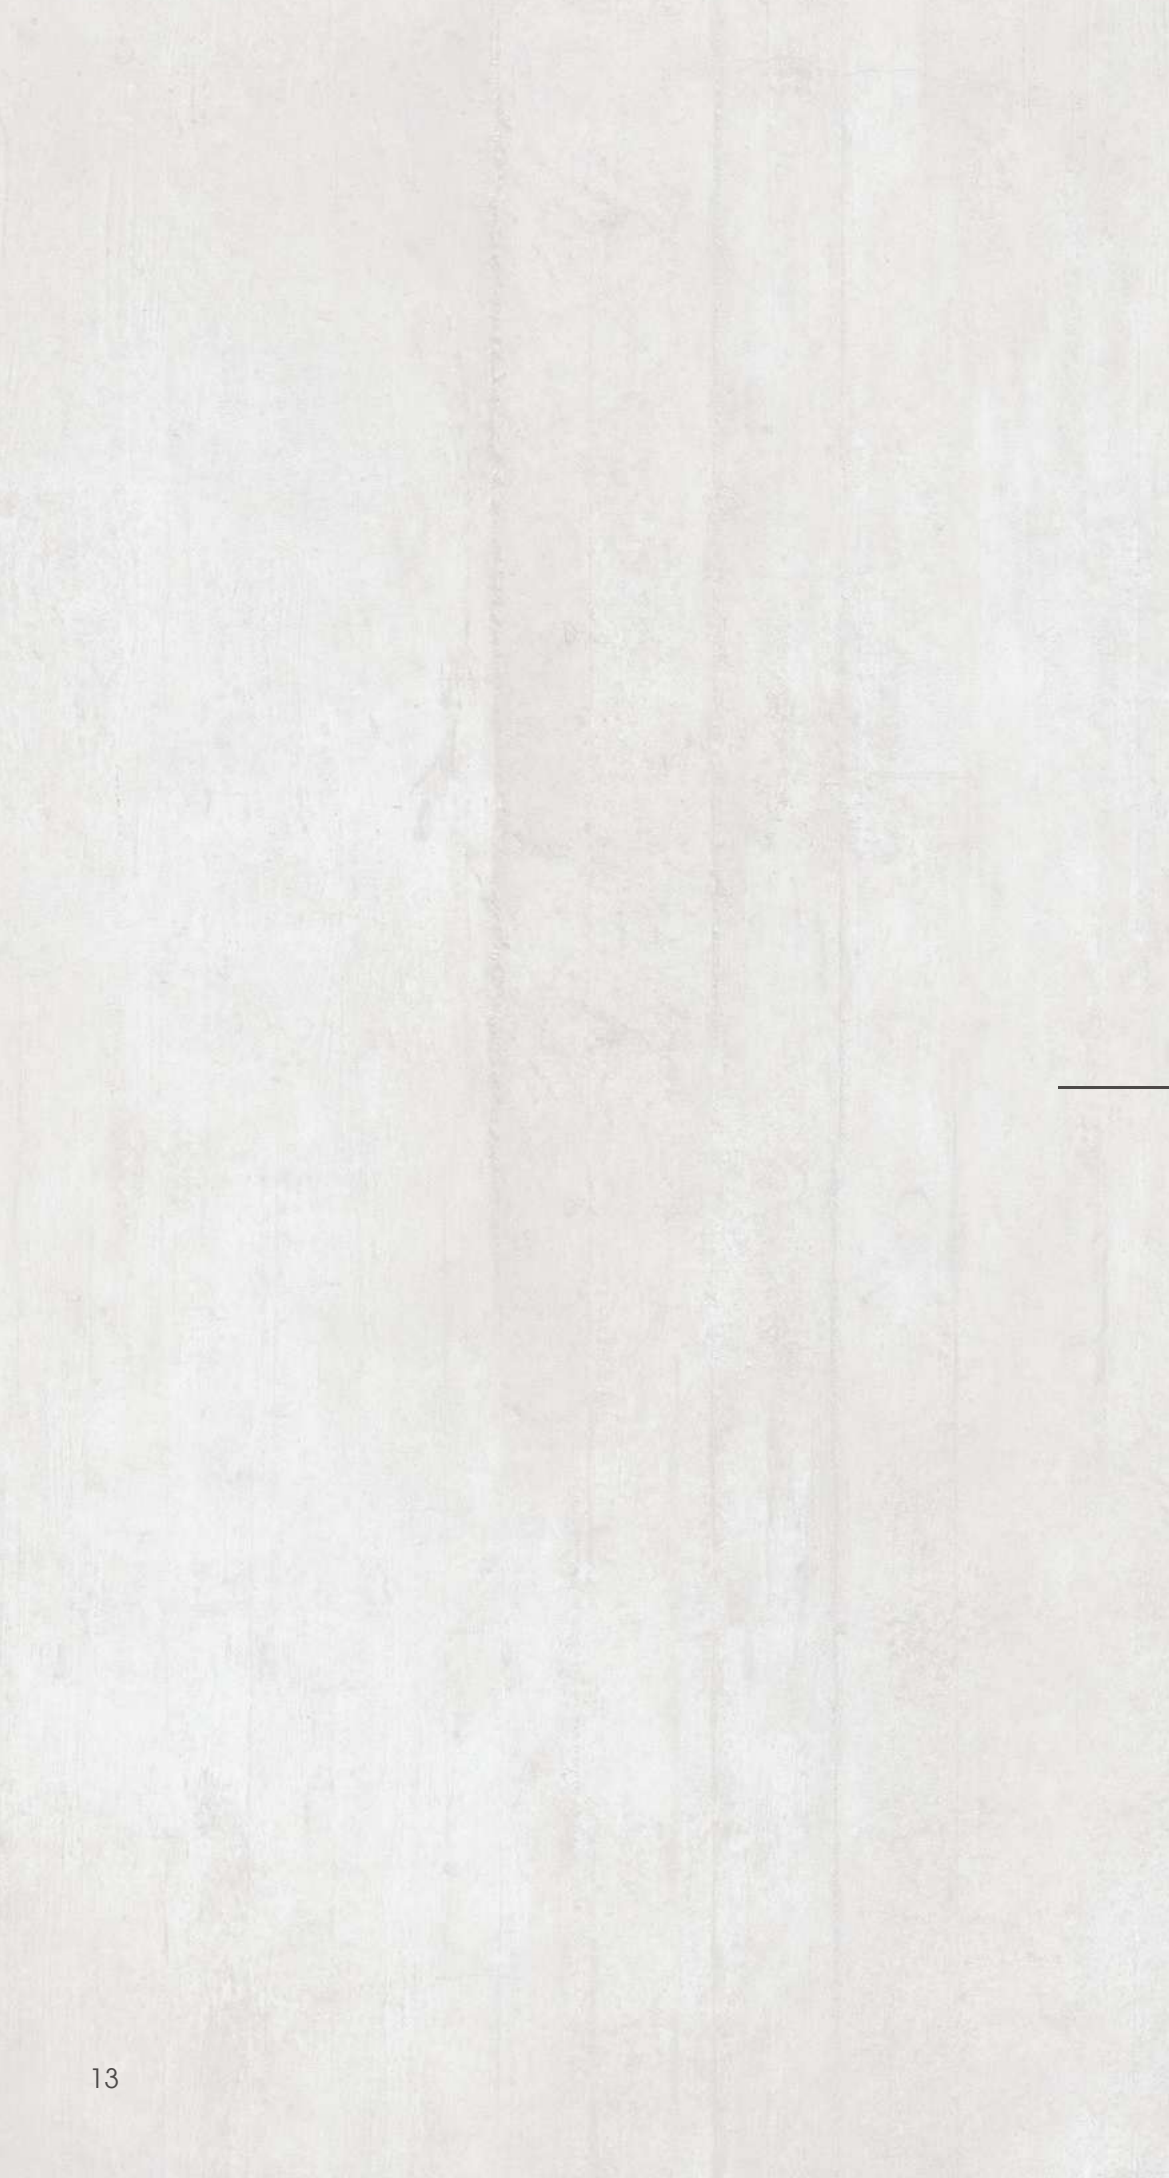

600x1200mm
24"x48"

Novara
Bianco

LN1

9
faces



Wall
LN1 600x1200mm 24"x48"

Floor
LN1 600x1200mm 24"x48"



600x1200mm
24"x48"

Novara
Cenere

LN2


9
faces



Wall
LN2 600x1200mm 24"x48"

Floor
LN2 600x1200mm 24"x48"



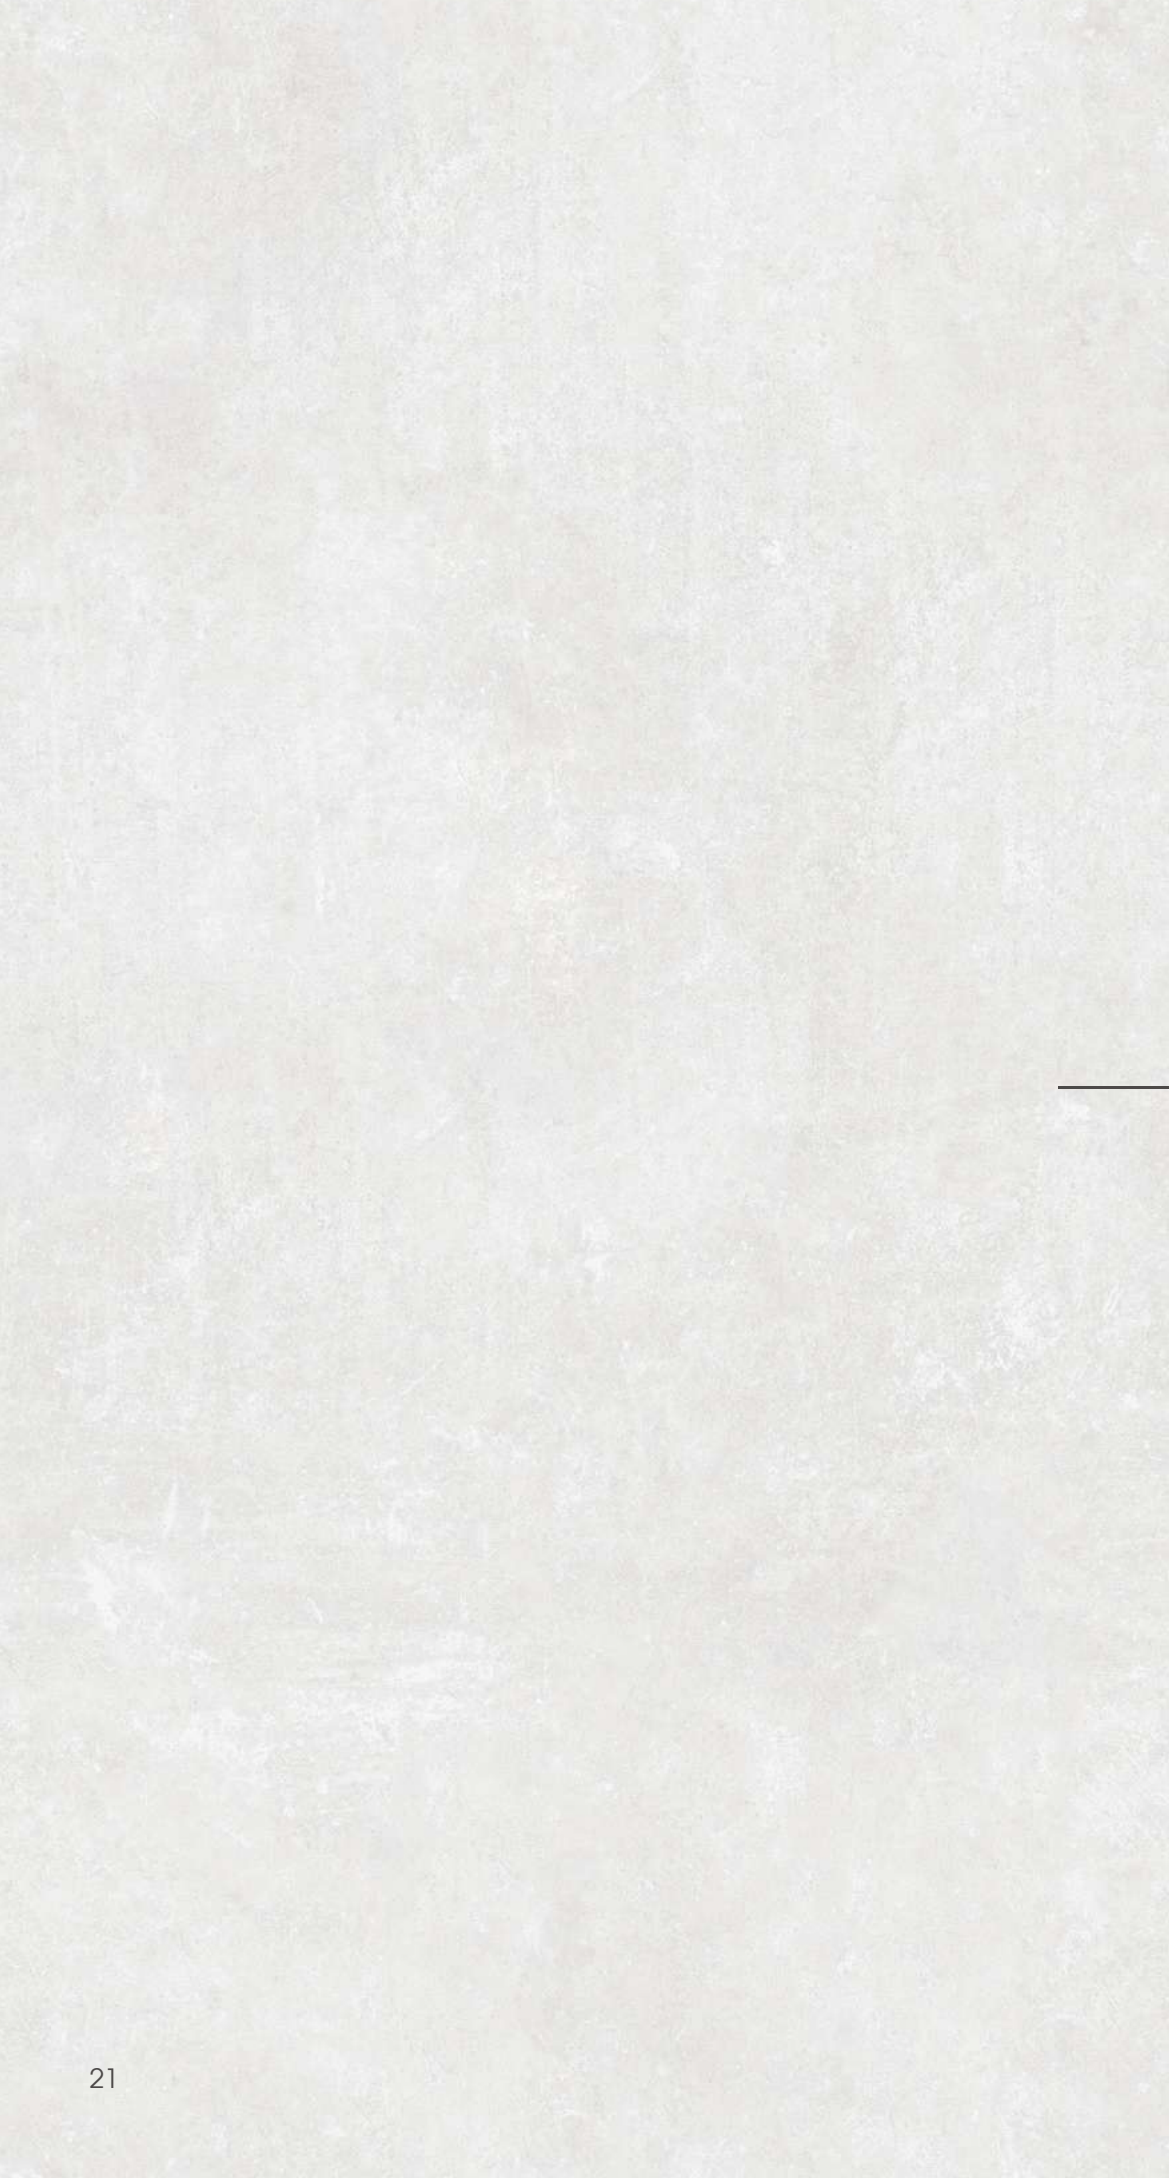

600x1200mm
24"x48"

Treviso
Bianco

LT1

9
faces



Wall
LT1 600x1200mm 24"x48"


Floor
LT1 600x1200mm 24"x48"



Wall
LT1 600x1200mm 24"x48"

Floor
LT1 600x1200mm 24"x48"



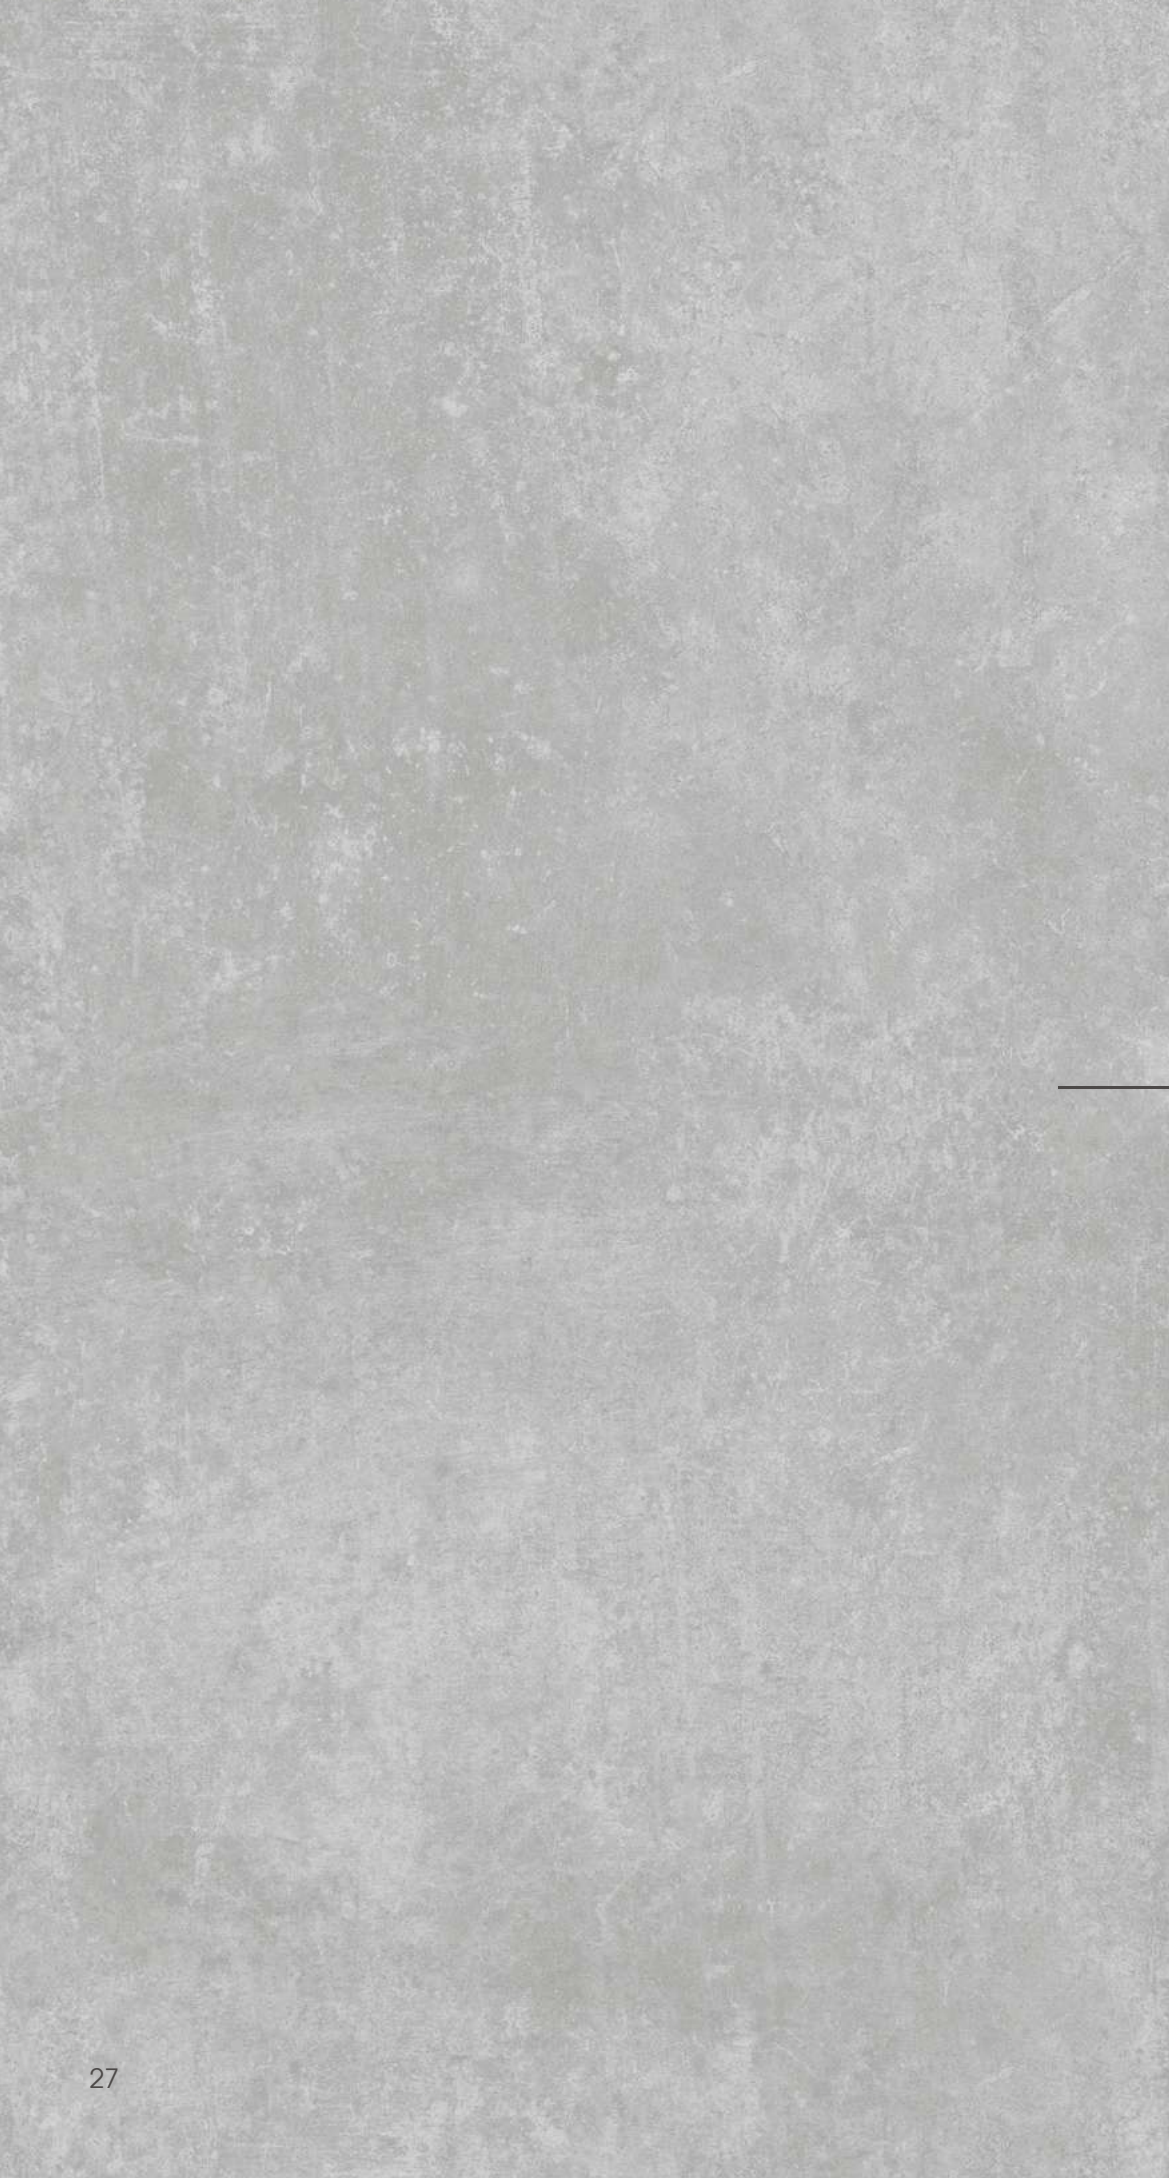

600x1200mm
24"x48"

Treviso
Cenere

LT2

9
faces



Wall
LT2 600x1200mm 24"x48"

Floor
LT2 600x1200mm 24"x48"





Wall
LT1 600x1200mm 24"x48"

Floor
LT2 600x1200mm 24"x48"

600x1200mm / 24"x48"



Packing Information

FORMAT(mm/in)	PCS/BOX	SMQ/BOX	KG/BOX	BOX/PALLET	SMQ/PALLET	KG/PALLET
600x1200 / 24"x48"	2	1.44	32	56	80.64	1792

▼
2-3mm
▲

Before laying,it is recommended to check the color number,size and so on,in order to achieve better results;it is suggested that the special joint mixture of Florina tile be used for all products of Florina tile;There shall be a seam for paving,and it is suggested that Florina's products have a 2-3mm.

Technical Performance

		TEST METHOD	INTERNATIONAL STANDARDS	FLORINA VALUE
	LENGTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	WIDTH	ISO 10545-2	±0.6%, ±2.0mm	±0.1%, ±1.0mm
	THICKNESS	ISO 10545-2	±5%, ±0.5mm	±1%, ±0.3mm
	SURFACE FLATNESS	ISO 10545-2	±0.5%, ±2.0mm	±0.5%, ±2.0mm
	STRAIGHTNESS OF SIDES	ISO 10545-2	±0.5%, ±1.5mm	±0.02%, ±0.1mm
	RECTANGULARITY	ISO 10545-2	±0.5%, ±2.0mm	±0.1%, ±1.0mm
	WATER ABSORPTION	ISO 10545-3	Eb ≤ 0.5 %	Eb ≤ 0.5 %
			Individual maximum 0.6%	Individual maximum 0.6%
	BREAKING STRENGTH	ISO 10545-4	≥1300N	≥1300N
	MODULUS OF RUPTURE	ISO 10545-4	Minimum 35	Minimum 35
			Individual minimum 32	Individual minimum 32
	STAIN RESISTANCE	ISO 10545-14	Minimum Class 3	Class 5 Livello 5 Clase5
	ABRASION RESISTANCE	ISO 10545-7	Report abrasion class	Class 3-4
			Report cycles passed	1500
	FROST RESISTANCE	ISO 10545-12	Required	Pasa
	CRAZING RESISTANCE	ISO 10545-11	Required	Pasa
	SLIP RESISTANCE	DIN 51130	From R9 to R10	Matt R9 - R10
		DIN 51097	Class A, B and C	Matt Class B Anti-Slip Class C
		ANSI A137.1-2012	Matt μ≥0.42	Matt μ≥0.55
		AS 4586:2013 Appendix A	PO - P5	Matt P3
		GB/T 4100-2015 Appendix M	μ ≥0.5	Static friction coefficient of floor tile ≥0.5